


# SEW120


100% Polyester




White  
Weiss

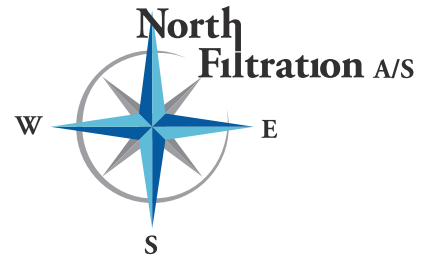

2,0/2,2  
Decitex



0,58  
mm



N/A  
%



200  
gram



MD 320 N/5cm Length  
CD 300N/5cm cross

## FILTER MEDIA DATA

SEW 120 is a 100% spun bond filters media that is manufactures from continuous fibre who does not permit the particles to become embedded.

SEW 120 is very rugged and have a high burst strength that make it resistant to abrasion water, heat and chemicals. 100 % Spun bond media makes pulse cleaning easier and are running with lower pressure drop SEW 120 is a washable filter media.



Dry  
Trocken

120 Celsius

Wet  
Feuchte

90 Celsius

Air Permeability | 200Pa  
Luftdurchlässigkeit | 200Pa

684 m3/m2/hr

## Chemical Resistance | Chemische Eigenschaften

|   | Excellent<br>Sehr Gur | Good<br>Gut | Fair<br>Mässig |
|---|-----------------------|-------------|----------------|
| Oil/water resistance<br>Öl und Wasserabweisend  | X                     | X           | X              |
| Hydrolysis resistance<br>Hydrolysebeständigkeit | X                     | X           | X              |
| Acid resistance<br>Säurebeständigkeit           | X                     | X           | X              |
| Alkaline resistance<br>Alkalienbeständigkeit    | X                     | X           | X              |



Phone +45 5460 2080

S.E.W. North Filtration A/S \* Vesterbrogade1, Section C \* DK-4930 Maribo  
E-mail: sales@northfiltration.com \* www.northfiltration.com \* VAT no.: DK 33 49 28 71

